


Microbioreactor System

C.NEST™

Streamline the path from culture to discovery



C.NEST

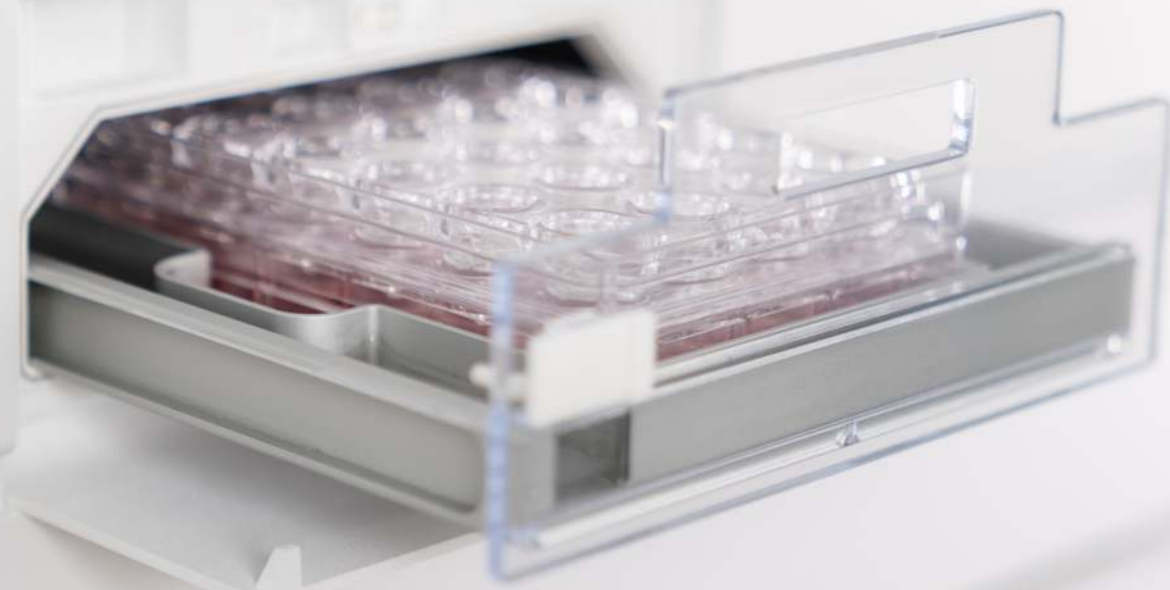

A robust, flexible & reliable system for everyday culturing



High-throughput Cultivation

- Four incubation chambers in one system
- Perform up to eight plates of static culture or up to four plates of mixing culture



Upscalable Design

- Enable customization of capacity and throughput for personalized solutions
- A multi-user system without interference from others while an experiment is carried out



Optimized Environment

- Compact plate holder design
- Independent control of temperature and CO₂ level in each chamber
- Humidity monitoring
- UV sterilization



Intuitive Software

- User-friendly interface
- Accessible for all levels of experience



Outstanding Flexibility


- Culture in multiple conditions by combining static and mixing environments in a single system
- Powerful mixing expands the range of application areas



Automation-friendly System


- Fully mechanized for easier operation
- Possible to integrate with robotic arms

The C.NEST designed to support superior cell growth and maintenance of a variety of cell lines and mammalian cells, even in single-cell and 3D cultures.

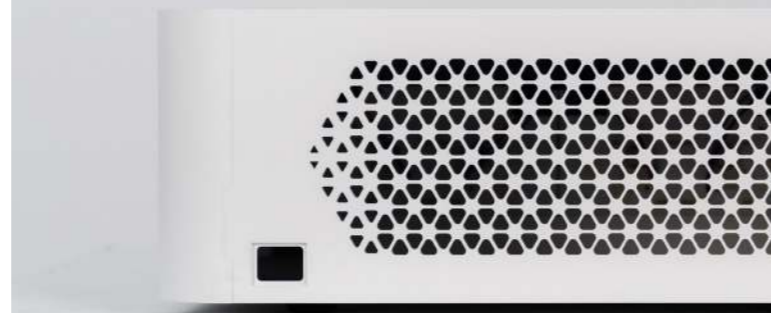




The power of mixing

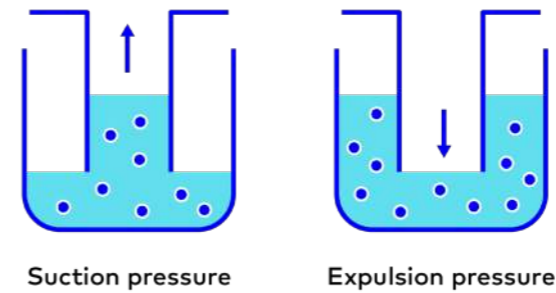

The C.NEST performs suction and expulsion pressure through the fluidic channels to enable continuous or periodic reciprocating mixing while the cell culture is carried out.

The oxygen transfer tubes connected to the lid offer the cells a continuous oxygen supply to maintain a healthy environment.

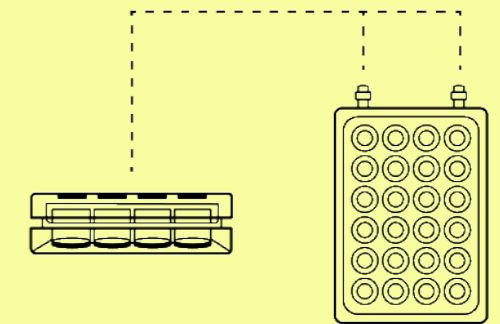

Reciprocating mixing creates optimized and variable conditions, expanding the system's range of application areas.

* Both 96-well and 24-well lids are available for mixing culture

Innovative design


The compact plate holder is designed to offer a more optimized environment and reduce evaporation during cell culture while offering a superior user experience.

The height allows two microwell plates to be placed in one chamber.

Equipped with electromagnetic lock and linear guideways that makes automation procedure possible.




Static culture

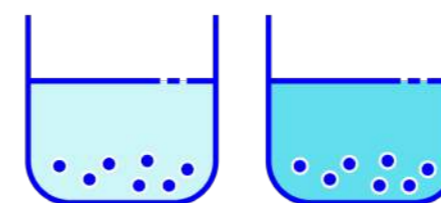

Limited 2D Growing Space

Inhomogeneous Medium

Mixing culture

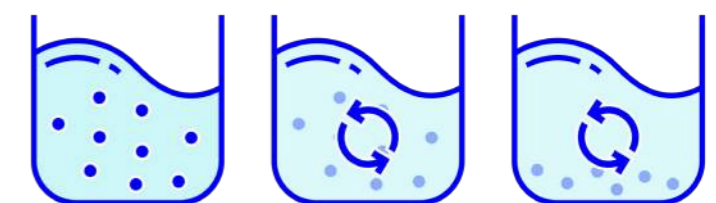

3D Growing Space

Equal Distribution
Suspension cell lines

Medium Refresh
Adherent cell lines

Both suspension and adherent culture are suitable for mixing conditions and can benefit from the homogeneous distribution of nutrition and oxygen.

Flexible solution

The C.NEST system can be used for static culture, mixing culture and a combination of the two all at once thanks to the ability to independently control both the hardware and software.

Each chamber can fit one 96- or 24-well plate and a corresponding lid to perform mixing culture. The system can also fit any plate format with its cover for static culture, including two 384-well and 96-well plates if they're placed vertically.




Deliver reliability and performance for results you can count on every day



Unlimited possibilities

Other analysis kits like enzymatic assays, activity assessment and several steps in ELISA can be performed simultaneously.

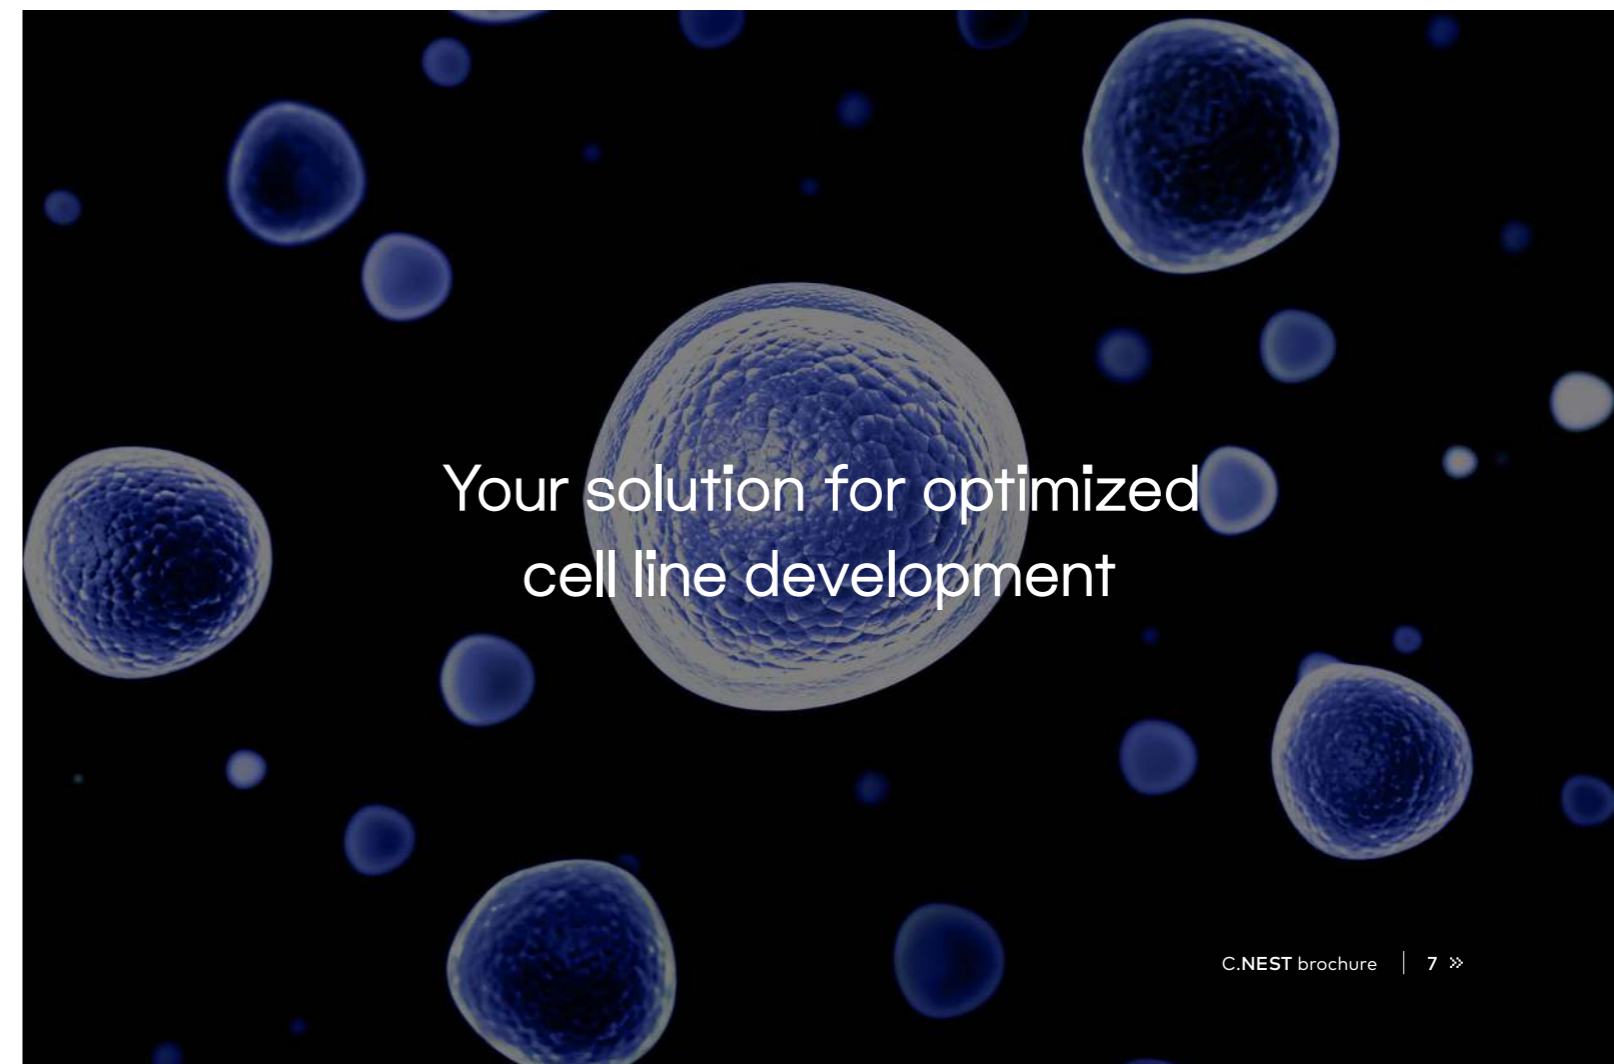

Your solution for optimized cell line development

Standard format



Customized two-system setup



Upscalable design in capacity



Customized three-system setup

Upscalable design enables customization of capacity and throughput for personalized solutions, and increases efficiency and productivity.


Customized four-system setup



The C.NEST Microbioreactor System is a powerful tool in many application areas



Cell Line Development



High-Throughput Screening



Drug Development



Cell Culture Research




3D Cell Models




Single-Cell Workflow

Intuitive software interface

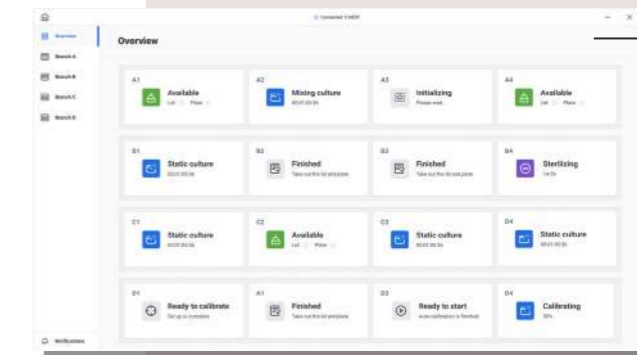

Overview page

- User-friendly design
- Robust model that controls up to 16 chambers with one laptop
- Easy-to-use with clear step-by-step instructions

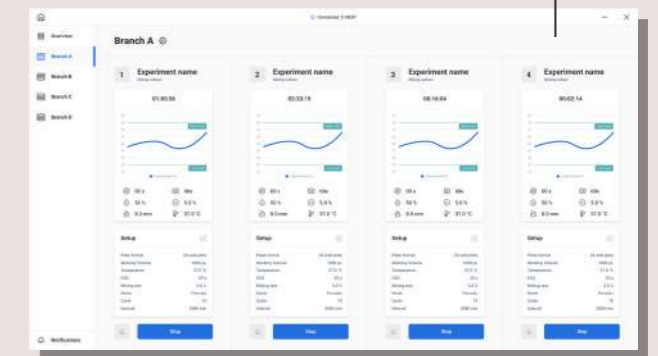

Experiment page

Specifications

General characteristics		
Dimensions		
Width	750	[mm]
Depth	460	[mm]
Height	180	[mm]
Weight	25	[kg]
Electrical characteristics		
Input voltage	100-240	[Vac]
Input voltage net tolerance	±10	[%]
Input voltage frequency	50/60	[Hz]
Max. input current	3.53 - 1.45	[A]
Power mains supply voltage fluctuations	±10	[%]
Installation category	CAT II	-
Input fuse type	250VAC, 16A, time-lag	-
Ambient conditions		
Min. temperature	20	[°C]
Max. temperature	30	[°C]
Min. rel. humidity (non-condensing)	20	[%]
Max. rel. humidity (non-condensing)	60	[%]
Max. altitude above normally zero for operation	2,000	[m]
Indoor use	Yes	-
Outdoor use	No	-
Pollution degree	2	-
Minimum space between the surrounding walls and instrument	100	[mm]
Transportation/storage conditions		
Min. temperature	20	[°C]
Max. temperature	30	[°C]
Min. rel. humidity (non-condensing)	20	[%]
Max. rel. humidity (non-condensing)	60	[%]
Max. altitude above normally zero for operation	2,000	[m]
Basic configuration		
Incubation conditions		
Temperature control	RT+5 – 45 ± 0.2	[°C]
CO ₂ level control	1 – 20 ± 0.3	[%]
Humidity monitoring	0 – 100 ± 5 (at 37°C)	[%]
Culture conditions		
Mixing rate (24-well format)	10 – 50 s ± 5	[%]
Mixing rate (96-well format)	10 – 50 s ± 5	[%]
Working volume (24-well format)	1,000 – 1,600	[μl]
Working volume (96-well format)	150-200	[μl]
Working volume (384-well format)	25-80	[μl]

* Each value above is specified with one standard deviation from its mean (M±1SD)

Ordering Information

Product No.	Product Name	Information
C.NEST Microbioreactor System		
D16110025165	C.NEST Microbioreactor – Standard format	–4 C.NEST cell culture chambers –C.NEST Software –Standard warranty (12 months from date of installation) –Installation & training included –Origin: Taiwan
Upon request	C.NEST Microbioreactor – Customized two-system	–8 C.NEST cell culture chambers –C.NEST Software –Standard warranty (12 months from date of installation) –Installation & training included –Origin: Taiwan
Upon request	C.NEST Microbioreactor – Customized three-system	–12 C.NEST cell culture chambers –C.NEST Software –Standard warranty (12 months from date of installation) –Installation & training included –Origin: Taiwan
Upon request	C.NEST Microbioreactor – Customized four-system	–16 C.NEST cell culture chambers –C.NEST Software –Standard warranty (12 months from date of installation) –Installation & training included –Origin: Taiwan
Recommended Consumables		
D16110025167	C.NEST Cell culture kit - 24-well	–20 sets / box –20 Single Packed Greiner CELLSTAR 24 Well Cell Culture Multiwell Plates (No.662102) –20 Single Packed C.NEST 24-well Lid
D16110025168	C.NEST Cell culture kit - 96-well	–20 sets / box –20 Single Packed Corning 96 Well Cell Culture Multiwell Plates (No. 3599) –20 Single Packed C.NEST 96-well Lid

Learn more



©2022 BICO AB. All rights reserved. Duplication and/or reproduction of all or any portion of this document without the express written consent of BICO is strictly forbidden. Nothing contained herein shall constitute any warranty, express or implied, as to the performance of any products described herein. Any and all warranties applicable to any products are set forth in the applicable terms and conditions of sale accompanying the purchase of such product. BICO provides no warranty and hereby disclaims any and all warranties as to the use of any third-party products or protocols described herein. The use of products described herein is subject to certain restrictions as set forth in the applicable terms and conditions of sale accompanying the purchase of such product. BICO may refer to the products or services offered by other companies by their brand name or company name solely for clarity and does not claim any rights to those third-party marks or names. BICO products may be covered by one or more patents. The use of products described herein is subject to BICO's terms and conditions of sale and such other terms that have been agreed to in writing between BICO and user. All products and services described herein are intended FOR RESEARCH USE ONLY and NOT FOR USE IN DIAGNOSTIC PROCEDURES.

CBSBC003